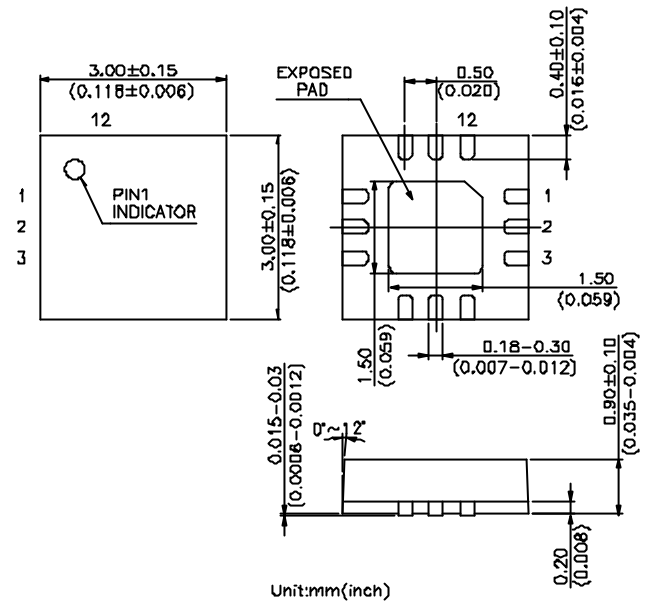


## Features

- **Low Insertion Loss:** 0.40 dB @ 0.87 GHz  
0.50 dB @ 2.5 GHz
- **High Isolation:** 55 dB @ 0.87 GHz  
47 dB @ 2.5 GHz
- **50 or 75 Ohm Systems**
- **Low DC Power Consumption**
- **Miniature QFN12L (3x3 mm) Using Lead (Pb) free materials with RoHS compliant**

## QFN12L (3 x 3 mm)



## Description

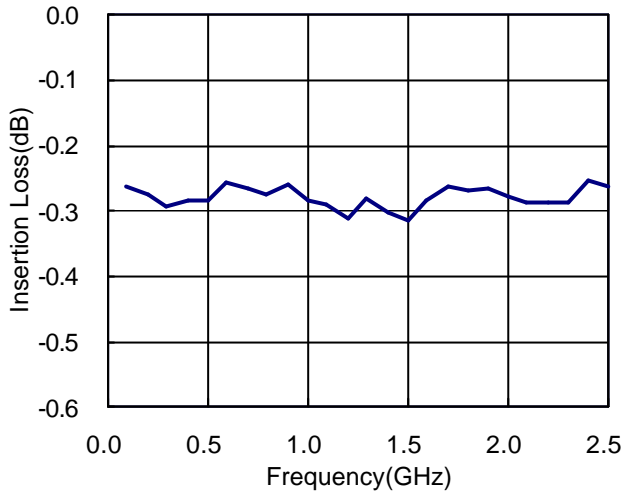
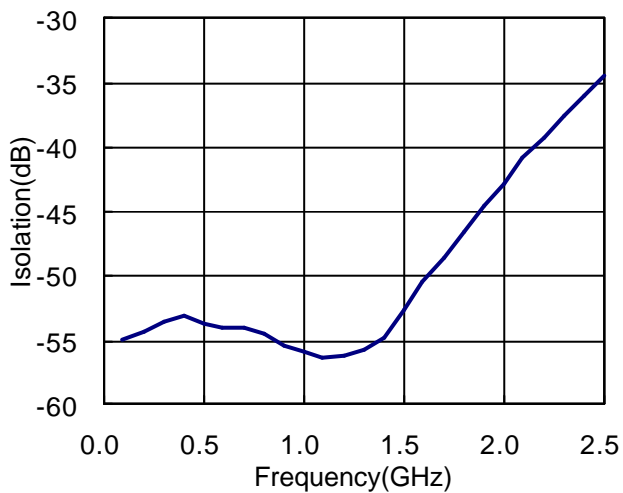
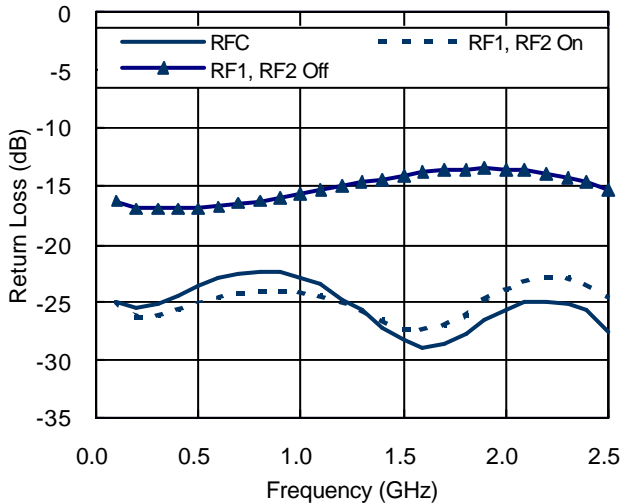
The HWS429 is a GaAs SPDT terminated (non-reflective) switch operating at DC-3 GHz in a low cost QFN12L (3x3 mm) plastic lead (Pb) free package. The HWS429 features low insertion loss and high isolation with very low DC power consumption and can be used in both 50 ohm and 75 ohm systems. Typical applications include CATV and basestation systems for either SPDT or SPST functions.

## Electrical Specifications at 25°C with 0, +3V Control Voltages, 50 Ohm system

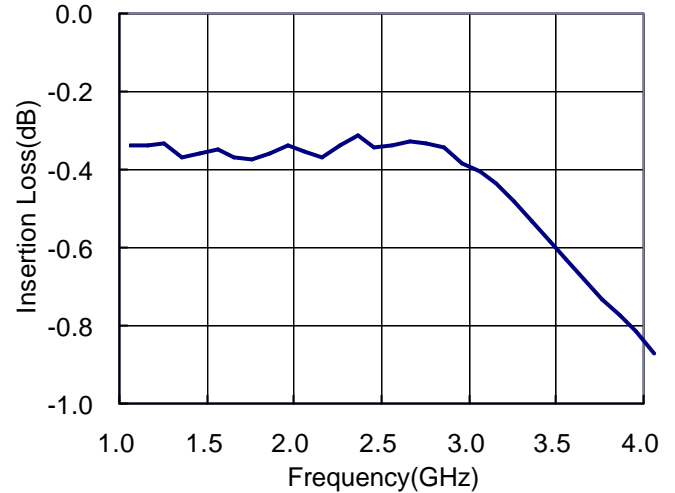
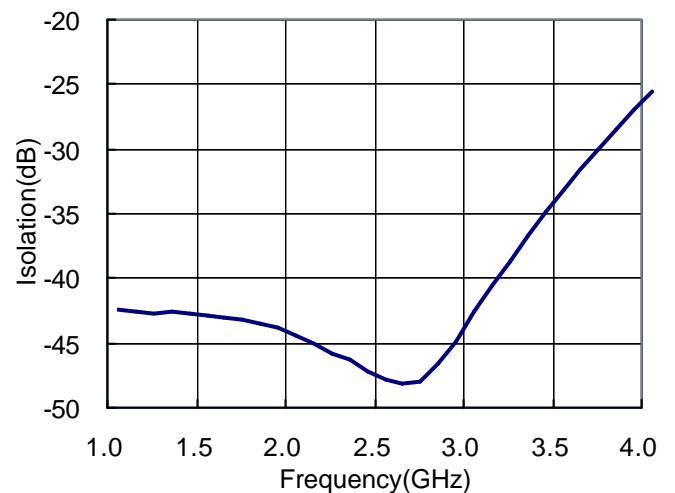
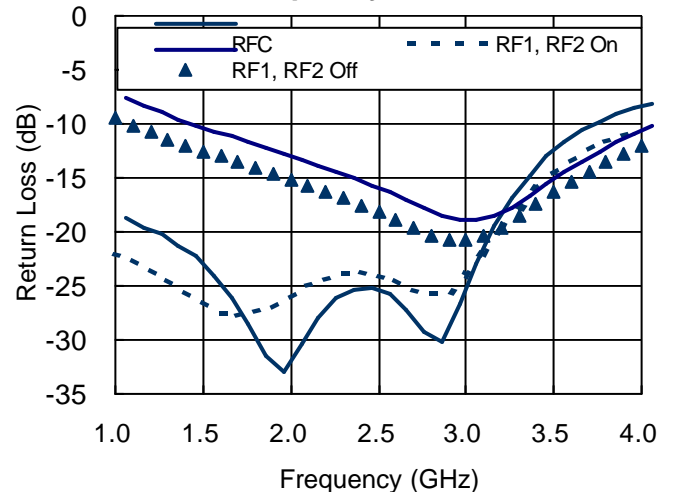
Parameter	Test Conditions	Min.	Typ.	Max.	Unit
Insertion Loss	DC-1.5 GHz		0.4		dB
	1.5-3.0 GHz		0.5	0.8	dB
Isolation	DC-1.5 GHz		53		dB
	1.5-3.0 GHz	35	43		dB
Return Loss	DC-3.0 GHz		15		dB
Input Power for One dB Compression	0.5-3.0 GHz		26		dBm
Input Third Order Intermodulation Intercept Point	0.5-3.0 GHz		45		dBm
Switching Time			50		ns
Control Current			30	300	uA

Note: All measurements made in a 50 ohm system with related application circuits and 0/+3V control voltages, unless otherwise specified.

### Typical Performance Data With Application Circuit A @ +25°C

**Insertion Loss vs Frequency**

**Isolation vs Frequency**

**Return Loss vs Frequency**


### Typical Performance Data With Application Circuit B @ +25°C

**Insertion Loss vs Frequency**

**Isolation vs Frequency**

**Return Loss vs Frequency**


## Absolute Maximum Ratings

Parameter	Absolute Maximum
RF Input Power	+32 dBm @ +5V
Control Voltage	+6V
Operating Temperature	-40°C to +85°C
Storage Temperature	-65°C to +150°C

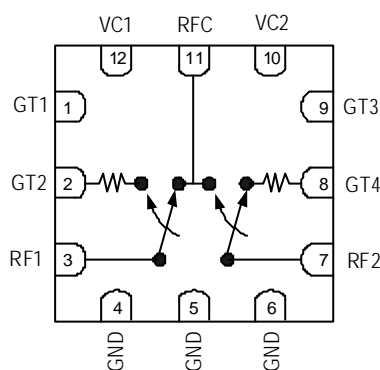
### Logic Table for Switch On-Path

VC1	VC2	RFC-RF1	RFC-RF2
0	1	Insertion Loss	Isolation
1	0	Isolation	Insertion Loss

'1' = +3V to +5V

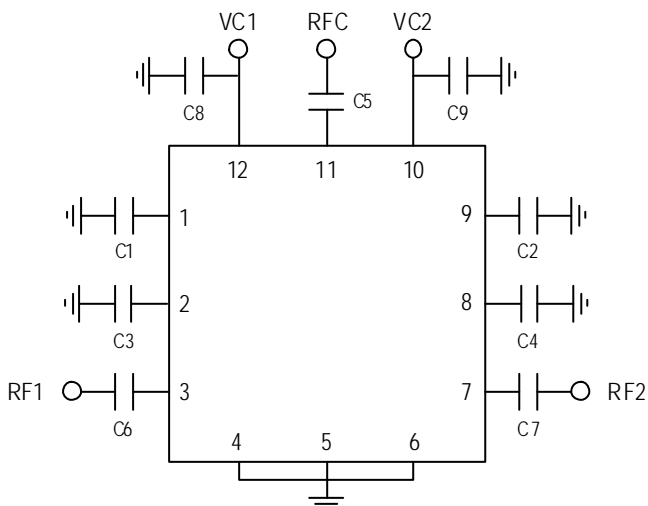
'0' = 0V to +0.2V

### Pin Out (Top View)



Exposed pad in the bottom must be connected to ground by via holes.

## Application Circuits



Component Values:

Circuit	C1, C2	C3, C4	C5, C6, C7	C8, C9
A	47pF	330pF	1000pF	47pF
B	2nF	4nF	47nF	47nF

Note: Circuit A and B are optimized for DC-1.5 GHz and 1.5-3.0 GHz, respectively.